


FO Patch Cord LC-UPC/LC-UPC Duplex Uniboot, SM9/125 OS2

FO Patch Cord SM OS2, LCD EZF - LCD EZF, type S, LL

The LCD-to-LCD EZF Patch Cord provide High Density interconnect and cross-connect for network applications over installations in entrance facilities, telecommunications rooms, data centres, and at the desk. Easy Flip LCD connectors provide tool-less polarity change. Uniboot cable saves significant space and simplifies cable management compared to traditional duplex cords. Preferably used for connecting and patching inside or between adjacent racks.

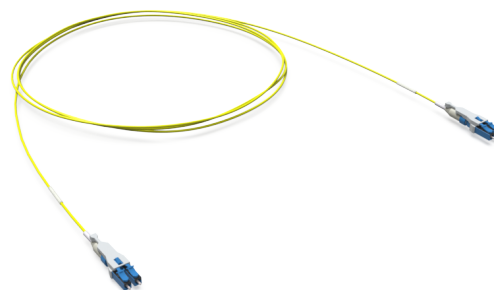

SPECIFICATION

Fiber quantity	2 fibers
Cable design	Round dielectric cable
Cable Outer Diameter, mm	2,0 mm
Outer Jacket Material	LSZH
Fiber type	SM 9/125 OS2
Connector, Side A	LC-UPC Duplex Uniboot switchable
IL, Side A	$\leq 0.17/0.35$ dB (typ/max)
RL, Side A	≥ 50 dB
Connector, Side B	LC-UPC Duplex Uniboot switchable
IL, Side B	$\leq 0.17/0.35$ dB (typ/max)
RL, Side B	≥ 50 dB
Polarity	Type S (straight, A-B/B-A)
Loss Category	Low Loss

Part Numbers

A2B1Axxx	FO Patch Cord SM OS2, LCD EZF - LCD EZF, type S, LL, [Length]m (XXX is the length in meters for values that are multiples of 1m; for lengths up to 10m that are not multiples of 1m - X.X)
----------	---