


FO Patch Cord LC/LC Duplex, MM50/125 OM4

FO Patch Cord MM OM4, LCD RH - LCD RH, type S, ULL

The LCD-to-LCD Reduced Height Patch Cord provide interconnect and cross-connect for network applications over installations in entrance facilities, telecommunications rooms, data centres, and at the desk. Reduced Height (RH) LC Duplex connectors support high-density connections to patch panels and cassettes, including 32-fiber C2 cassettes and Mycelium Currant cassettes.

Mini-ZIP cable saves significant space and simplifies cable management compared to traditional duplex cords. Preferably used for connecting and patching inside or between adjacent racks.

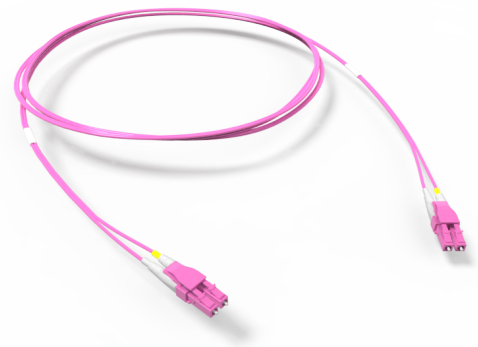

SPECIFICATION

Fiber quantity	2 fibers
Cable design	TWIN ZIP
Cable Outer Diameter, mm	1,8 mm
Outer Jacket Material	LSZH
Fiber type	MM 50/125 OM4
Connector, Side A	LC Duplex Reduced Height (RH)
IL, Side A	$\leq 0.12/0.25$ dB (typ/max)
RL, Side A	≥ 25 dB
Connector, Side B	LC Duplex Reduced Height (RH)
IL, Side B	$\leq 0.12/0.25$ dB (typ/max)
RL, Side B	≥ 25 dB
Polarity	Type S (straight, A-B/B-A)
Loss Category	Ultra Low Loss

Part Numbers

A1A1Axxx	FO Patch Cord MM OM4, LCD RH - LCD RH, type S, ULL, [Length]m (XXX is the length in meters for values that are multiples of 1m; for lengths up to 10m that are not multiples of 1m - X.X)
----------	--