


FO patch cord LC-UPC/LC-UPC Duplex SM9/125 OS2

FO Patch Cord SM OS2, LCD - LCD, type S, LL

The LCD-to-LCD Patch Cord provide interconnect and cross-connect for network applications over installations in entrance facilities, telecommunications rooms, data centres, and at the desk. Mini-ZIP cable saves significant space and simplifies cable management compared to traditional duplex cords. Preferably used for connecting and patching inside or between adjacent racks.

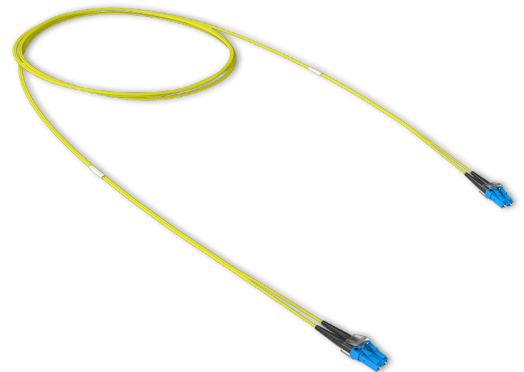

SPECIFICATION

Fiber quantity	2 fibers
Cable design	TWIN ZIP
Cable Outer Diameter, mm	1,8 mm
Outer Jacket Material	LSZH
Fiber type	SM 9/125 OS2
Connector, Side A	LC-UPC Duplex
IL, Side A	$\leq 0.17/0.35$ dB (typ/max)
RL, Side A	≥ 50 dB
Connector, Side B	LC-UPC Duplex
IL, Side B	$\leq 0.17/0.35$ dB (typ/max)
RL, Side B	≥ 50 dB
Polarity	Type S (straight, A-B/B-A)
Loss Category	Low Loss

Part Numbers

A221Axxx	FO Patch Cord SM OS2, LCD - LCD, type S, LL, [Length]m (XXX is the length in meters for values that are multiples of 1m; for lengths up to 10m that are not multiples of 1m - X.X)
----------	---